




5W/10W SOLAR BATTERY TRICKLE CHARGER MAINTAINER



5W

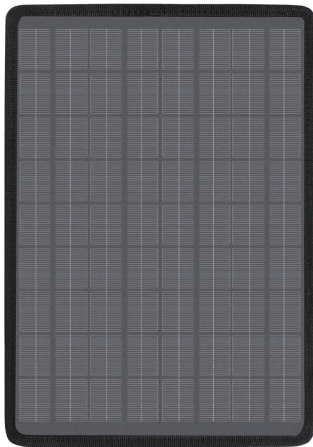

10W



RENOGY 5W/10W SOLAR BATTERY TRICKLE CHARGER MAINTAINER

Over time batteries naturally lose power and, if allowed to, can go flat. Renogy's 5W 10W Solar Battery Trickle Charger Maintainer will help you maintain a healthy battery by converting solar energy into a usable 12V DC current to keep your battery topped off at a stable level. With quick SAE connection and 3 options for ring terminals, alligator clips, and cigarette lighters, our Solar Battery Trickle Charger Maintainer is sure to be a great fit no matter what your application needs. It works great with boats, SUVs, RVs, electric fences, accessory batteries, and much more! Maintain a healthy battery and never be caught flat ever again!

KEY FEATURES

- Plug-and-play solar 12V battery trickle charger maintainer
- Easy to use DC adaptors for direct battery connection (cig lighter, alligator clips, ring terminal, SAE connection)
- Charges 12 Volt batteries with the power of the sun
- Works with boats, SUVs, RVs, electric fences, accessory batteries, and more
- High-efficiency solar panel to charge in all daylight conditions
- Built-in safety protection, plug-in 24/7 to battery
- Maintenance free and easy to install

INCLUDED COMPONENTS



SAE TO ALLIGATOR CABLE



SUCTION CUP



SAE TO RING CABLE



SAE TO CIG CABLE

PARAMETERS

Max Power at STC	5W	10W
Short Circuit Current	0.28A	0.56A
Open Circuit Voltage	18V	18V
Optimum Operating Current	0.31A	0.59A
Optimum Operating Voltage	23.57V	23.47V
Output Interface	SAE	SAE
Output Tolerance	+/-5%	+/-5%
Operating Temperature	-4°F ~ 140°F / -20°C ~ 60°C	-4°F ~ 140°F / -20°C ~ 60°C
Dimension	11.42 x 7.2 x 0.2 in 290 x 185 x 5 mm	13.19 x 9.29 x 0.2 in 335 x 246 x 5 mm
Product Weight	10.8 oz 306.6 g	14.23 oz 403.4 g
Certification	FCC ; CE; RoHS	